



Transport and storage case



Battery compartment

Digital refractive index measurement for laboratories and the industry for multi-application

Features

- The KERN ORD refractometers are accurate and universal maintenance free digital handheld refractometers.
- The typical and practical design is suitable for a quick and convenient everyday use and is characterized by its easy-using and robustness.
- The large display is easy to read. Mistakes in reading are avoided.
- A large selection of models is available with single or multiple scales. This allows the use in various applications.
- The instrument comes with an optimized software that can show a result in different scales.
- The integrated automatic temperature compensation (ATC), avoids the manual conversion of the measurement. This allows a quick and efficient usage of the instrument.
- The following accessory-parts are included:
 - Calibration liquid
 - Pipette
 - Storage box
 - 2 × AAA batteries
 - Leather bag
 - Small screwdriver
 - Cleaning tissue

Technical data

- Measurement temperature: 10°C – 30°C
- Packing dimensions W×D×H 235×200×65 mm
- Overall dimensions W×D×H 133×65×38 mm
- Net weight approx. 200 g
- Power supply: 2 × AAA (1,5 V)
- Lifetime of the battery: 10000 measurements
- ATC (Automatic Temperature Compensation)
- Minimum sample volume: 2–3 drops
- Automatic energy management (turns off after 5 minutes)



Distributed by:

Lab Unlimited
CARL STUART GROUP

Tallaght Business Park
Whitestown, Dublin 24,
Ireland
D24 RFK3

Tel: (01) 4523432
Fax: (01) 4523967
E-mail: info@labunlimited.com
Web: www.labunlimited.com

Quatro House, Frimley Road,
Camberley,
United Kingdom
GU16 7ER

Tel: 08452 30 40 30
Fax: 08452 30 50 30
E-mail: info@labunlimited.co.uk
Web: www.labunlimited.co.uk

Scope of application: Sugar

The following models are particularly suitable for the measurement of the “BRIX” value. They are used to determine the sugar content in food, especially in fruit, vegetables, juice and sweet or soft drinks. In the same ideal way, these refractometers serve in monitoring processes in the industry (coolant monitoring, oils, lubricants and fats). Alternatively, the display can be switched to show the refractive index.

The main scope of applications is:

- Industry: Monitoring of lubricants in machines and quality control
- Food industry: Beverages, fruits and sweets
- Agriculture: Determination of the degree of ripeness of fruit for quality control in harvesting
- Restaurants and large-scale catering establishment



Model	Scales	Measuring range	Accuracy	Division	
KERN					
ORD 45BM	Brix Refractive index	0 - 45 % 1,3330 - 1,4098 nD	± 0,2 % ± 0,0003 nD	0,1 % 0,0001 nD	
ORD 92BM	Brix Refractive index	58 - 92 % 1,4370 - 1,5233 nD	± 0,2 % ± 0,0003 nD	0,1 % 0,0001 nD	
ORD 85BM	Brix Refractive index	0 - 85 % 1,3330 - 1,5100 nD	± 0,2 % ± 0,0003 nD	0,1 % 0,0001 nD	

Scope of application: Honey

The following models are particularly suitable for the measurement of the “BRIX” value, the water content in honey according to the International Honey Commission (IHC2002) and “degrees Baumé” to determine the relative density of liquids. Alternatively the display can be switched to show the refractive index.

The main scope of applications is:

- Beekeeping
- Honey production



Model	Scales	Measuring range	Accuracy	Division	
KERN					
ORD 92HM	Brix Baumé Water content Refractive index	58 - 92 % 38 - 43 °Bé 13 - 25 % 1,4370 - 1,5233 nD	± 0,2 % ± 0,1 °Bé ± 0,1 % ± 0,0003 nD	0,1 % 0,1 °Bé 0,1 % 0,0001 nD	

Scope of application: Salt

The following models are particularly suitable to determine the concentration of NaCl (salt) in water. This is often used for the preparation and for the cooking of sauces, bases for pastries, the production of brines (e.g. for white cheese) and the preparation of seafood and marinades for meat. Alternatively the display can be switched to show the refractive index.

The main scope of applications is:

- Food industry
- Restaurants, and large-scale catering establishment, canteens



Model	Scales	Measuring range	Accuracy	Division	
KERN					
ORD 1SM	Salt (NaCl) Refractive index	0 - 28 % 1,3330 - 1,3900 nD	± 0,2 % ± 0,0003 nD	0,1 % 0,0001 nD	
ORD 3SM	Brix Salt (NaCl) Refractive index	0 - 35 % 0 - 28 % 1,3330 - 1,3900 nD	± 0,2 % ± 0,2 % ± 0,0003 nD	0,1 % 0,1 % 0,0001 nD	

Scope of application: Wine

The following models are particularly suitable for the measurement of the sugar content in fruit. It indicates the expected °Alcohol of the fruit. The degree of ripeness of fruit (fruit-sugar) can also be determined, such as e.g. grapes.

The main scope of applications is:

- Agriculture: Wine-growing (viticulture) and fruit-growing
- Wine-production
- Must and alcohol production



°Oe = Degree Oechsle, °KMW = Klosterneuburger Most Waage

Model	Scales	Measuring range	Accuracy	Division	
KERN					
ORD 2WM	Mass SW Vol. AP Oechsle KMW (Babo)	0 - 35 % 0 - 22 % 30 - 150 °Oe 0 - 25 °KMW	± 0,2 % ± 0,1 % ± 1 °Oe ± 0,1 °KMW	0,1 % 0,1 % 1 °Oe 0,1 °KMW	

Scope of application: Urine

The following models are particularly suitable for the measurement of the specific gravity (sg) in urine, the quantity of serum (serumproteine) in urine (doping control among athletes), and the refractive index.

The main scope of applications is:

- Hospitals
- Doctor's surgeries/Physicians
- Medical training institutions
- Nursing homes
- Sports medicine (doping test)



Model	Scales	Measuring range	Accuracy	Division	
KERN					
ORD 1PM	Serum protein Urine (spec. gravity) Refractive index	0 - 12 g/dl 1,000 - 1,050 sgU 1,3330 - 1,3990 nD	± 0,1 g/dl ± 0,001 sgU ± 0,0003 nD	0,1 g/dl 0,001 sgU 0,001 nD	

Scope of application: Industry/Automotive

The following models are particularly suitable for the measurement and determination of AdBlue, glycol concentration (ethylene EG, propylene PG), battery fluid (BF), urea, the freezing point of fountain solution (CW) and the refractive index. Furthermore these models are suitable for the measurement of thermal exchange systems.

The main scope of applications is:

- Automotive industry: Car-workshops and producers
- Chemical industry
- Solar industry: Antifreeze monitoring
- Geothermal industry: Brine-concentration-measurement for ground heat
- Forestry/Lumbermen




Model	Scales	Measuring range	Accuracy	Division	
KERN					
ORD 2UM	EG PG BF CW	-50 - 0 °C -50 - 0 °C 1.00 - 1.50 kg/l -40 - 0 °C	± 0,5 °C ± 0,5 °C ± 0,01 kg/l ± 0,5 °C	0,1 °C 0,1 °C 0,01 kg/l 0,1 °C	
ORD 5UM	EG PG Urea CW	-50 - 0 °C -50 - 0 °C 0 - 40 % -40 - 0 °C	± 0,5 °C ± 0,5 °C ± 0,2 % ± 0,5 °C	0,1 °C 0,1 °C 0,1 % 0,1 °C	
ORD 6US	Urea	0 - 40 %	± 0,2 %	0,1 %	

Scope of application: Expert applications

The following model has a special large measuring range for the refractive index.

The main scope of applications is:

- Universal measuring instrument, especially for applications with extra large measuring ranges

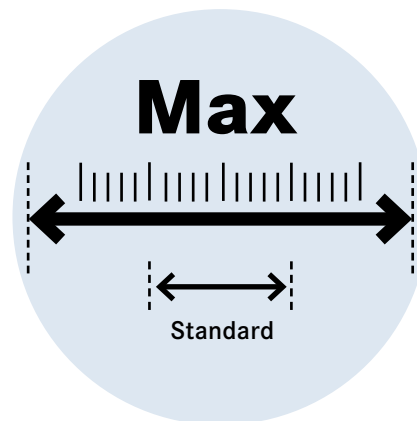

Model	Scales	Measuring range	Accuracy	Division	
KERN					
ORD 1RS	Refractive index	1,3330 - 1,5400 nD	± 0,0003 nD	0,0001 nD	

Accessory parts: Digital refractometer – ORD

Model	Description	
KERN		
ORA-A1001	Calibration liquid – distilled water Volume: 2,5 ml	
ORA-A1006	Calibration liquid – Triethyl citrate Volume: 2,5 ml	
ORD-A2104	Leather bag for digital refractometer (Spare part)	



Calibration liquid,
Contact liquid

Relationship overview – refractometer calibration (digital)					
Model refractometer	Calibration value	Calibration liquid	Article number liquid	Calibration block	Article number block
ORD 45BM; ORD 85BM; ORD 1SM; ORD 3SM; ORD 2WM; ORD 1PM; ORD 1RS, ORD 2UM; ORD 5UM; ORD 6US	0 % Brix	distilled water	ORA-A1001	-	-
ORD 1SM	0 % Salt (NaCl)	distilled water	ORA-A1001	-	-
ORD 2WM	0 °KMW	distilled water	ORA-A1001	-	-
ORD 1PM; ORD 1RS	1,3330 nD	distilled water	ORA-A1001	-	-
ORD 2UM; ORD 5UM	0 °C EG/PG/CW	distilled water	ORA-A1001	-	-
ORD 6US	0 % Urea	distilled water	ORA-A1001	-	-
ORD 92BM; ORD 92HM	60 % Brix	Triethyl citrate CAS 77-93-0	ORA-A1006	-	-

360° rotatable microscope head 360°	Fluorescence illumination for compound microscopes With 3 W LED illumination and filter FL-LED	SD card For data storage SD
Monocular Microscope For the inspection with one eye MONO	Phase contrast unit For a higher contrast PH	PC software To transfer the measurements from the device to a PC. SOFTWARE
Binocular Microscope For the inspection with both eyes BINO	Darkfield condenser/unit For a higher contrast due to indirect illumination DF	Automatic temperature compensation For measurements between 10 °C and 30 °C AUTO ATC
Trinocular Microscope For the inspection with both eyes and the additional option for the connection of a camera TRINO	Polarising unit To polarise the light POLAR	Protection against dust and water splashes IPxx The type of protection is shown by the pictogram. IP
Abbe Condenser With high numerical aperture for the concentration and the focusing of light ABBE	Infinity system Infinity corrected optical system INFINITY	Battery operation Ready for battery operation. The battery type is specified for each device. BATT
Halogen illumination For pictures bright and rich in contrast HAL	Zoom magnification For stereomicroscopes ZOOM	Battery operation rechargeable Prepared for a rechargeable battery operation RECHARGE
LED illumination Cold, energy saving and especially long-life illumination LED	Parallel optical system For stereomicroscopes, enables fatigue-proof working PARALLEL	Mains adapter 230V/50Hz in standard version for EU. On request GB, AUS or USA version. 230 V
Incident illumination For non-transparent objects IL	Integrated scale In the eyepiece SCALE	Power supply Integrated in balance. 230V/50Hz standard EU. More standards e.g. GB, AUS or USA on request. 230 V
Transmitting illumination For transparent objects TL	USB 2.0 digital camera For direct transmitting of the picture to a PC USB 2.0	Package shipment The time required to manufacture the product internally is shown in days in the pictogram. 1 DAY
Fluorescence illumination for stereomicroscopes FL	USB 3.0 digital camera For direct transmitting of the picture to a PC USB 3.0	Warranty The warranty period is shown in the pictogram. 3 YEARS WARRANTY
Fluorescence illumination for compound microscopes With 100 W mercury lamp and filter FL-HBO	HDMI digital camera For direct transmitting of the picture to a display device HDMI	

Abbreviations

C-Mount Adapter for the connection of a camera to a trinocular microscope	LWD Long Working Distance	SWF Super Wide Field (Field number at least \varnothing 23 mm for 10 \times eyepiece)
FPS Frames per second	N.A. Numerical Aperture	W.D. Working Distance
H(S)WF High (Super) Wide Field (Eyepiece with high eye point for wearers of glasses)	SLR Kamera Single-Lens Reflex camera	WF Wide Field (Field number up to \varnothing 22 mm for 10 \times eyepiece)

Your KERN specialist dealer:

Distributed by:

Lab Unlimited
CARL STUART GROUP

Tallaght Business Park
Whitestown, Dublin 24,
Ireland
D24 RFK3

Tel: (01) 4523432
Fax: (01) 4523967
E-mail: info@labunlimited.com
Web: www.labunlimited.com

Quatro House, Frimley Road,
Camberley,
United Kingdom
GU16 7ER

Tel: 08452 30 40 30
Fax: 08452 30 50 30
E-mail: info@labunlimited.co.uk
Web: www.labunlimited.co.uk